TAF1CM/-AN Aquanomic Aquaflow 1 Single Lever

Product finish	Chrome
Product category	Single Lever
First supplied date	05/07/2013

EAN 13 barcode	5015834043937
Location of DOM trace code:	ABAF1B(mm/yy) on rear of handle

Nb. Model shown may not be displayed in the finish as described.

Product features:

- Metal construction throughout
- Single lever control for effortless single handed control
- Flow Limited output for part G compliance
- Supplied compete with flexible tail pipes for fast simple fitting
- Classic European design styling

Additional information / Parts included:

To include alignment label on top of handle

Product dimensions & valve type:

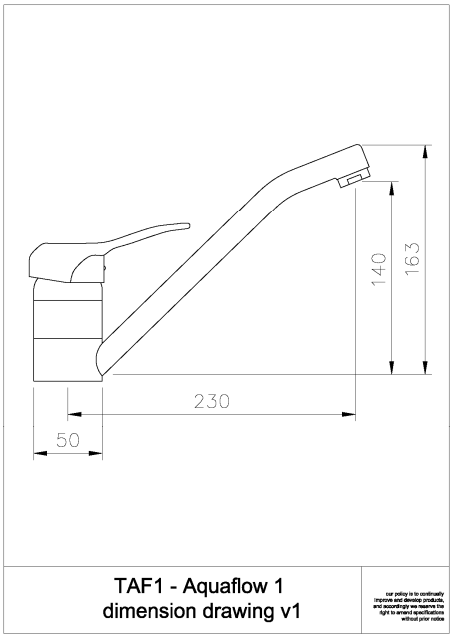

- **Overall Height / projection:** 163 mm
- **Exit reach:** 230 mm
- **Exit height:** 140 mm
- **Centre distance(s):** N/A mm

- **Base diameter(s):** 50 mm
- **Recommended fixing hole diameter:** Ø35 mm
- **Max. surface fixing depth:** 40 mm

- **Control valve type:** 40mm Ø Ceramic single lever
- **Valve detail:** N/A

- **DDA compliant design?** Yes

Product flow characteristics:

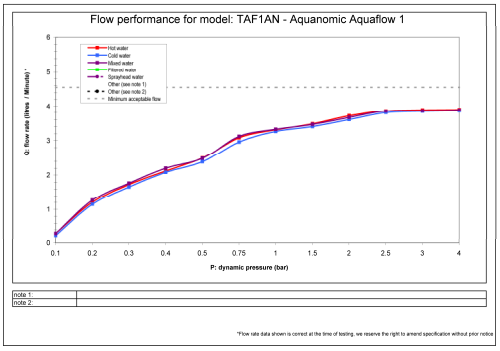

- **Min / Max water pressure:** 1.00 / 4.00 bar (HP1)

- **Recommended / Maximum water temperature:** 46°C / 70°C

- **Part G:**
Unrestricted mixed flow rate, 3 bar (litres / min): 3.8 +/-10%

*Flow results are produced under test conditions and represent the non flow regulated dynamic output of the product model.

LP (lower pressure) less than 0.5 bar
MP (medium pressure) 0.5 bar to 1 bar
HP1 (high pressure) 1 bar to 2 bar
HP2 (very high pressure) 2 bar or more

Minimum flow rate (1 GPM) based on mixed flow.

TAF1CM/-AN Aquanomic Aquaflow 1 Single Lever

Flow regulator included? 3.8L/min, on valve exit

Inlet pipes:

- **Tail pipe inlet / outlet size:** M12x1 / 1/2" BSPP Male / 15mm ID
- **Inlet pipe type / length:** Flexible stainless braided hose / 245 mm

Spout detail & Flow characteristics:

- **Spout diameter:** 22 mm
- **Spout aerator size:** M24x1 M
- **Spout rotation range:** 360°
- **Aerator type:** Honeycomb Aerator
- **Aerator colouring:** Neoperl HC grey & light blue
- **Spout connection:** Upper body unscrews

- **Product flow characteristics:** Single flow
- **Non return valve (NRV) supplied:** X 2 Filter (15mm) Integral to hot & cold flexis
- **NRV required to be installed for byelaw compliance:** Yes, on both hot & cold supplies

Product markings and indicators:

- **Branding position:** None
- **Hot / Cold indication:** Red & Blue Split Plastic Indices

Packaged properties:	
Box length: 355 mm	**Box depth:** 60 mm
Box width: 135 mm	**Units per outer:** 10
Box has 'pressure warning sticker' ?	No
Packaging branding:	Brown unprinted box

Tap only weight: 0.88 kg
Boxed weight: 1.25 kg
Total card weight: 96 grams
Total plastics weight: 15 grams

- **Approval certificate number:** WRAS 1405307
- **Expiry date:**

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 2 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 years

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives